



1. From the Neara Homepage, click on the Ausgrid Design project template.

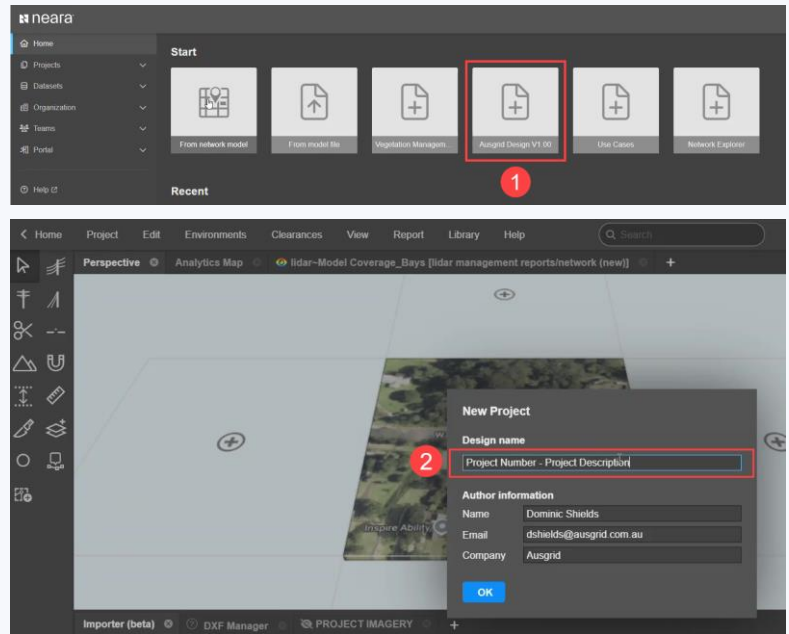


2. Create a name for the project and click on the OK button.

Once saved, the project name will appear in the top right-hand corner:

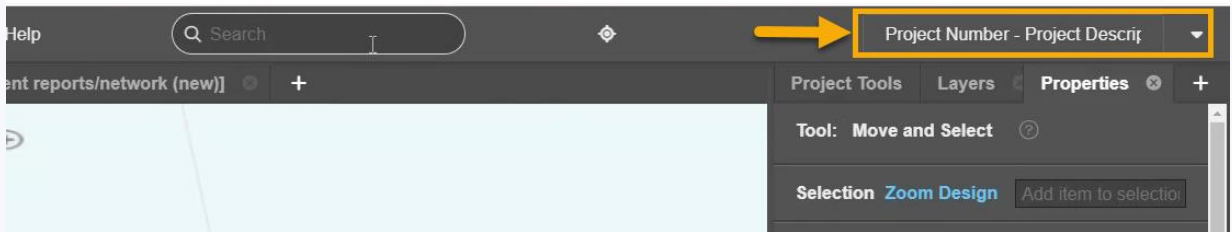

3. Search for the target pole using the search bar.
4. Select the Network Model.

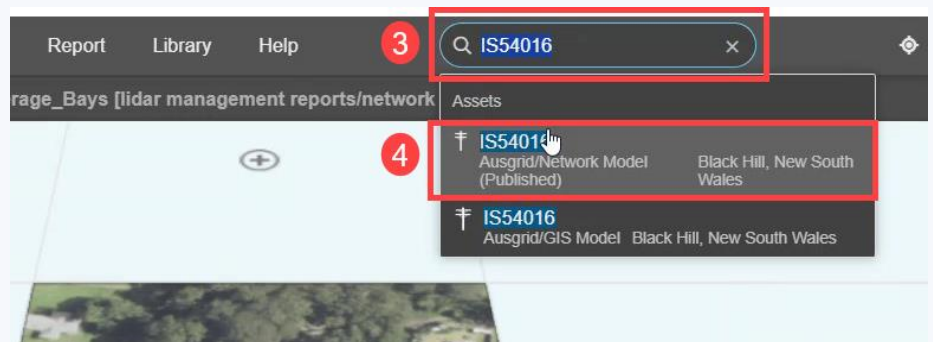

This will open the Analytics Map;

5. Right-click on the pole and select 'Jump to Location'.




This will open the Perspectives view. Zoom out/in for reference perspective.

Note: During loading, a white pop-up box will appear which says 'Calculating' or 'Loading' whilst Neara is loading the page. Be patient while the model loads all the information.




Once the right reference perspective is selected, the project can be started.

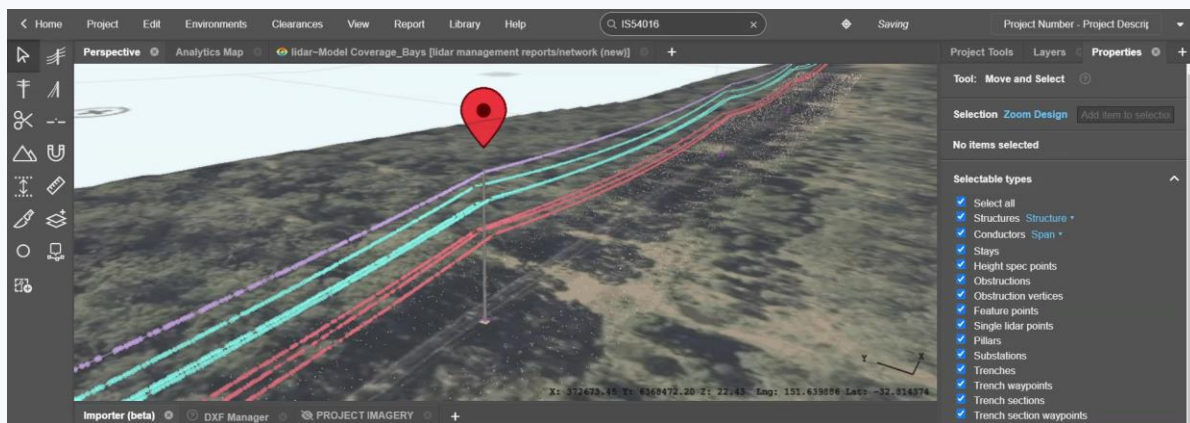

## Delete the Auto Model

If the Network Model is not suitable in this location, delete the model and start the project using the LiDAR dataset chosen:

1. Click on the Project Tools tab.
2. Click on Model Quick Actions.
3. Click on the Delete All button.

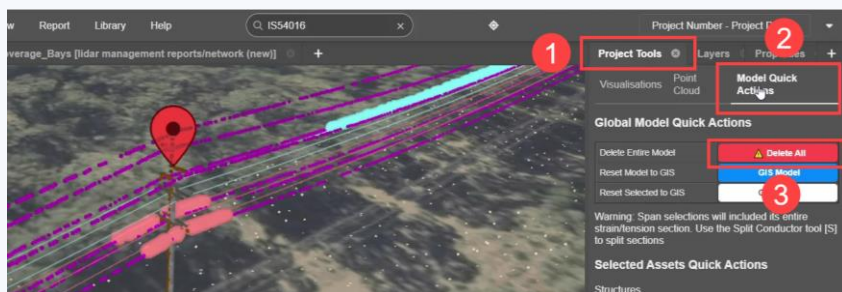

This leaves a blank canvas of the associated LiDAR that has been left within the layers that are turned on:

